


ENCLOSURE SPECIFICATIONS:

Dimensions:	6.9" x 4.2" x 2.6" [174mm x 106mm x 65mm]
Mounting Holes:	*See Drawing
Weight:	.50 LBS (.23 kg) (w/ coiled cable assembly)
Material:	Polycarbonate, UV Stable
Color:	Safety Yellow
Environmental Rating:	IP66
Operating Temperature:	-40 to 85 C (-40 to 185 F)
Flammability:	UL94V-2
Controller Types:	Carrier (ML2, ML2i, ML3) Daikin StarCool MHI York/Thermo King (MPC2000, MP3000, MP4000)

*Additional cable adaptors may be needed.

COILED CABLE SPECIFICATIONS:

Dimensions:	48" total length (retracted) .75" [19mm] diameter coil
Jacket Material:	Polyurethane, UV stable
Jacket Color:	Safety Yellow
Jacket OD:	.190" (+/- .01")
Internal Conductors:	(4) 22awg conductors (7/30 stranded) Orange, red, black, brown
Voltage Rating:	300vrms

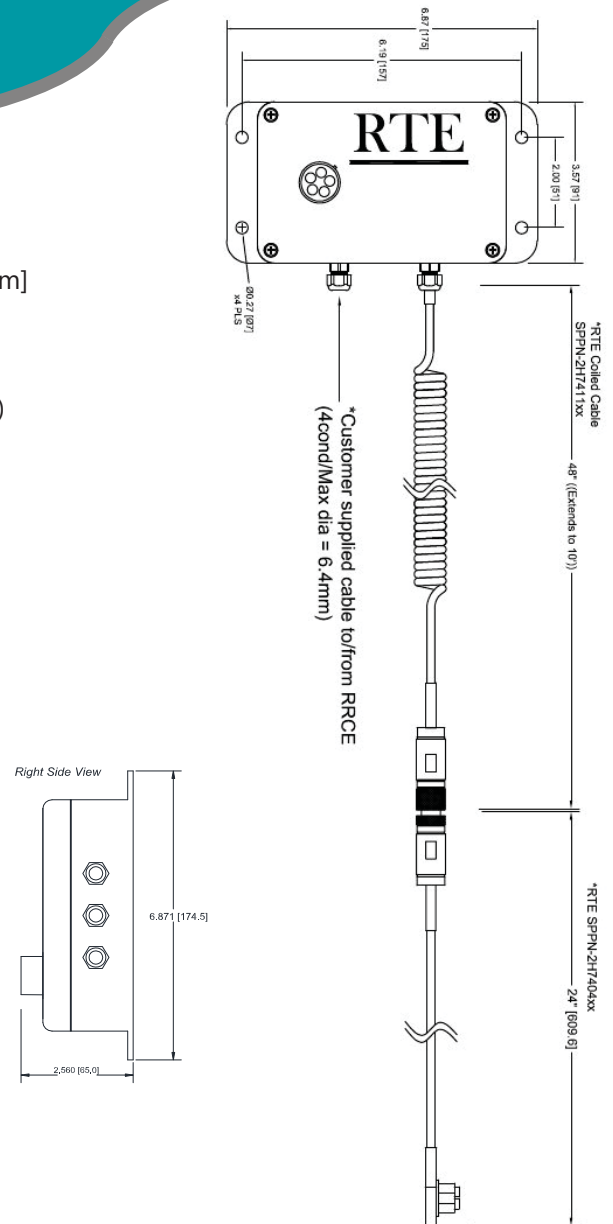

5PIN CONNECTOR - DEUTSCH:

Connector Type: 5pin Deutsch
(Crimp wire connections)

Material: UV Stabilized ABS

Housing Color: Safety Yellow

Operating Temp.: -40 to 85 C (-40 to 185 F)

5PIN CONNECTOR - CANNON:

Connector Type: 5pin Cannon (Conxall)
(Crimp wire connections)

Material: UV Stabilized ABS

Housing Color: Black

Operating Temp.: -40 to 85 C (-40 to 185 F)

CABLE SPECIFICATIONS:

Dimensions: 2ft [610mm]

Jacket Material: Polyurethane w/ UV stable

Jacket Color: Safety Yellow

Jacket OD: .190" (+/- .01")

Internal Conductors: (4) 22awg conductors
(7/30 stranded)
Orange, red, black, brown

Voltage Rating: 300vrms

3PIN CONNECTOR:

Connector Type: 3pin Deutsch
(Crimp wire connections)

Material: UV Stabilized Polyamide (PA)

Housing Color: Gray

Operating Temp.: -40 to 85 C (-40 to 185 F)

9PIN CONNECTOR:

Connector Type: DB9 (9pin) (Solid wire connections)

Material: UV Stabilized ABS

Housing Color: Black

Operating Temp.: -40 to 85 C (-40 to 185 F)

4PIN CONNECTOR - RTE SYSTEM CONNECTION:

Connector Type: 4pin M12 (IDC wire connections)

Material: Stainless Steel

Housing Color: Natural

Operating Temp.: -40 to 85 C (-40 to 185 F)